

EX[®] IEC Universal Compression Connectors Series 59 and 6

Installers are faced with the problem of identifying old unmarked 60% through Quad Shield Series 6 cable, and having to guess which connector is the best match. This results in unnecessary service calls due to the use of the wrong connector/cable match.

The unique patented design of the EX[®] body achieves true universality on 60% through Quad Shield for PE, and PVC jackets.




Specifications

Bandwidth	0 MHz to 2,2 GHz
Impedance	75 Ohms (nominal)
Return Loss	Minimum - 15dB to 1,75 GHz
Insertion Loss	Less than .52 dB to 1,75 GHz
Operating Voltage	90 V (at 60 Hz continuous AC)
Operating Temperature	-40o F to + 140o F (-40o C to 60o C)
Cable Retention	45 lbs (20.41 kg) minimum

Meets or Exceeds all SCTE Specifications

Features

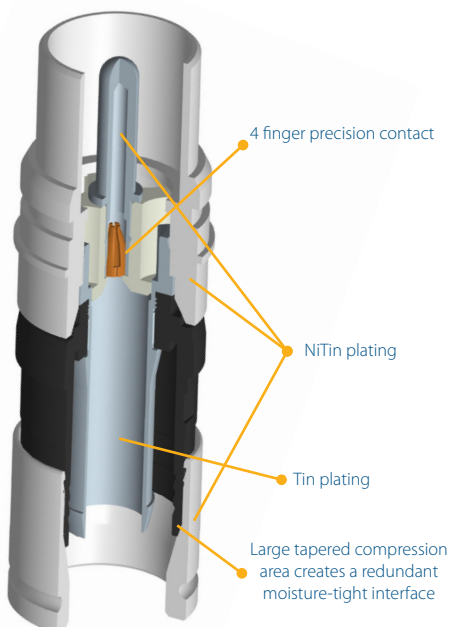

Part Numbers

EX6-4983-IECm	EX [®] Universal compression IEC male connector, series 6 cable
EX6-4983-IECf	EX [®] Universal compression IEC female connector, series 6 cable
EX6-5183-IECm	EX [®] Universal compression IEC male connector, series 6 cable, Ø5.1 OC cables
EX6-5183-IECf	EX [®] Universal compression IEC female connector, series 6 cable, Ø5.1 OC cables
EX59-3979-IECm	EX [®] Universal compression IEC male connector, CommScope & Times Fiber
EX59-3979-IECf	EX [®] Universal compression IEC female connector, CommScope & Times Fiber



Preparation & Installation Tools

Compression Tools	CAT-AS-IEC/F-FX	
	VT150DK	
¼" – ¼" universal drop cable preparation tool	LDT596-250	DDT59611